


Shown interlocked

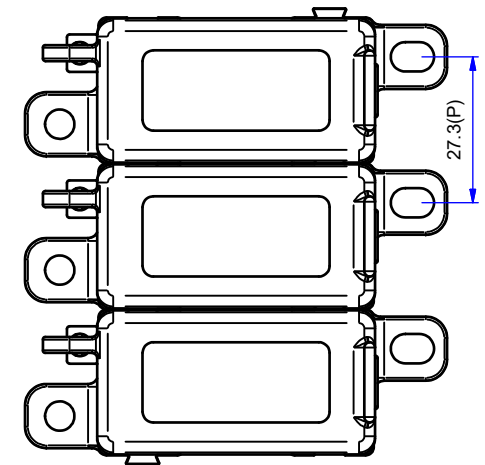

#### Notes:

1. Recommended Fuses : For AFD and AFS(Fuse-link type SF 30) Series
2. Base Material: NY GF%, Black.  
M5 Studs & Split washers : Steel Zinc-plated  
M5 Nut Material: Steel Zinc-plated with nylock inserts  
Cover Material: Rubber, Black.
3. Max Fuse Rating : 200A
4. Max Voltage Rating: 58V
5. Stud Torque: 3.0~5.0 Nm (M5 Threads)  
Mounting Torque: 5 Nm (M4 Bolts & Washers)
6. Temperature rating: -40°C to 125°C.
7. Wire size : 8mm<sup>2</sup> to 35mm<sup>2</sup>

#### Applications:

- Compatible with HFD bolt-down fuses up to 200 amps (sold separately unless indicated)
- Dovetail feature lets you connect multiple HFD Flex Series fuse holders together to create a fused high-power distribution block (busbars for multi-fuse applications are sold separately)
- Slots molded into the base enable secure tie-wrap mounting
- Bolt-down fuse holder base features an M4 mounting hole and an M4 slot measuring 6mm long

<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE (REF. ISO 2768 mK) DECIMALS ANGULAR 0.5-6±0.1 ±1° 6-30±0.2 30-120±0.3 120-400±0.5 DO NOT SCALE DRAWING</small>		CUSTOMER NO.	JENN FENG ELECTRIC INDUSTRIAL CO., LTD. TITLE <b>Bolt-Down Fuse Holder</b> PART NO. <b>HFD</b> DRAWING NO. <b>BA23011301</b>
		DRAWN BY <b>Tim</b>	
		CHECKED BY	
		APPROVED BY	
P/N		DATE <b>2025/12/3</b>	
REV	<b>C</b>	SCALE	