
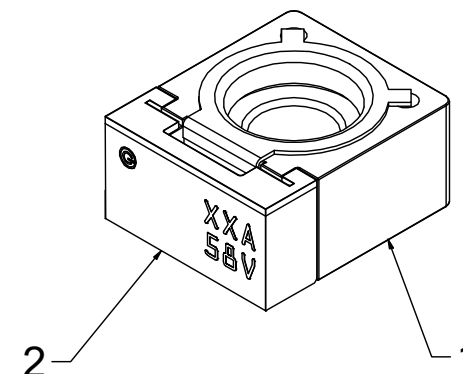


FUSE AMPERAGES

ABF - XXX

030 - 30 AMPS
040 - 40 AMPS
050 - 50 AMPS
060 - 60 AMPS
075 - 75AMPS
080 - 80 AMPS
100 - 100 AMPS
125 - 125 AMPS
150 - 150 AMPS
175 - 175 AMPS
200 - 200 AMPS
225 - 225 AMPS
250 - 250 AMPS
300 - 300 AMPS
350- 350 AMPS
400 - 400 AMPS
500 - 500 AMPS

FUSE RATING (A)	MAX.FUSE-LINK VOLTAGE DROP (mV)
30	110
40	110
50	110
60	105
75	105
80	100
100	100
125	95
* 150	90
* 175	85
* 200	80
* 225	80
* 250	75
* 300	70
* 350	80
* 400	80
500	80

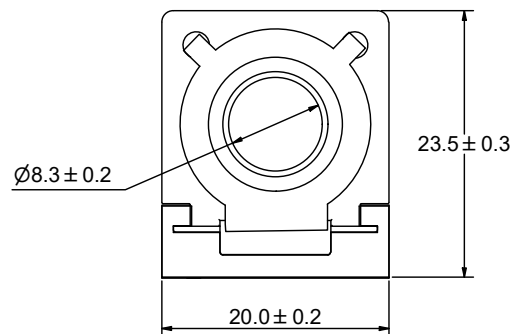

ITEM	QTY	DESCRIPTION
1	1	FUSE CERAMIC BODY
2	1	COVER
3	1	FUSE ELEMENT


Electrical Characteristics Test
According to ISO 8820-6

TEST CURRENT (A)	OPERATING TIME(S)					
	30A-150A		175A-300A		350-500A	
	MIN.	MAX.	MIN	MAX	MIN.	MAX.
0.75 In	-	-	-	-	14,400	∞
1.0 In	360,000	∞	360,000	∞	-	-
1.35 In	5	1800	5	1800	-	-
1.5 In	1	600	1	600	-	-
2.0 In	0.2	60	0.2	60	1	15
3.5 In	0.03	1.0	0.03	1.0	-	-
6.0 In	0.01	0.2	-	-	-	-

Note:

- 1.The marked " *"denotes the fuse rated over 150A are not tested for 6 In
- 2.Vlotage Drop: This teseshall be at 0.75 In for the following(350A-500A)

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN mm
TOLERANCE
DECIMALS ANGULAR
X±0.25 ±2°
XX±0.13
DO NOT SCALE DRAWING



P/N

REV

C

CUSTOMER NO.

DRAWN BY Vivi

CHECKED BY

APPROVED BY

DATE 2025/3/17

SCALE

© JENN FENG ELECTRIC INDUSTRIAL CO., LTD.

TITLE

AUTOMOTIVE BATTERY FUSE

PART NO.

ABF-XXX

DRAWING NO.

BA12032301